

ELECTRICAL Accessories


Fan Tray

(A)

These are 19" mountable fan trays used to position cooling fans (90CFM) at any convenient height inside the cabinet. The fan trays are useful when equipment mounted inside the cabinet need forced air cooling. They are suitable for mounting 2 or 4 fans. Fans must be ordered separately.

Ordering Information

Tray Fan, 1U 2-Fan Position	86-1550
Tray Fan, 1U 4-Fan Position	86-1551
Tray Fan 19"Adjustable, 1U	86-1562

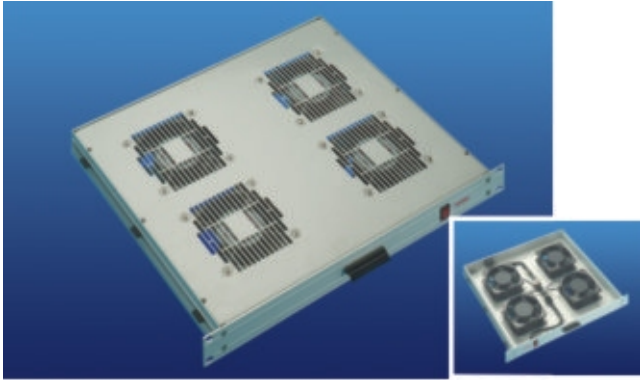

Fan Tray

Fan Housing Unit

(CX) (CY)

Top-mounted fan housing units hold up to 4 fans and are fitted to the underside of top cover. A cover plate with ventilation slots is fitted to the outside of the top cover. When fan housing units are not ordered, a plain top cover plate is provided. Fans are to be ordered separately.

Ordering Information

For Cyberack and Cyberack Dlx	
Fan Housing Unit, 90 CFM, 2 Fan	86-1553-2
Fan Housing Unit, 90 CFM, 4 Fan	86-1554-4



Fan Housing Unit


Cooling Fans

(A)

Cooling fans are used for thermal management inside equipment cabinets. These fans can be fitted in fan housing units fixed to the underside of cabinet covers, or in 19" fan trays which can be located close to sensitive equipment that needs to be cooled.

Ordering Information

Fan 230VAC 90 CFM	86-1566
Fan 230VAC 250 CFM	86-1567
Finger Guard for 90 CFM Fan	86-1601
Finger Guard for 250 CFM Fan	86-1602

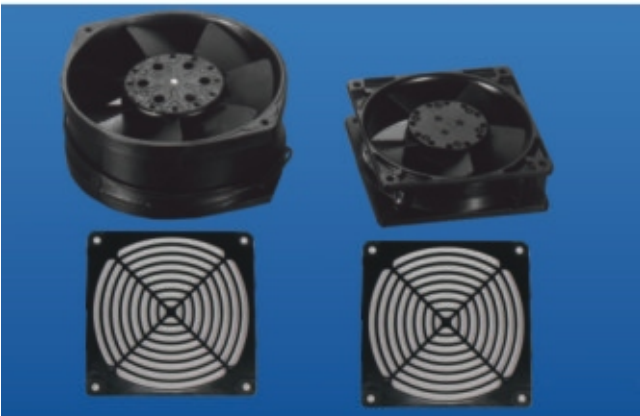

Cooling Fans with Finger Guards

Fan Tray for Door Mounting

(A)

Two models of fan trays for mounting on doors are available. These are suitable for use with full width doors of 600mm wide, or with the dual doors for 1200mm deep Server cabinets.

Ordering Information

Fan Tray Door Mtg, 2 Posn	86-1557
Fan Tray Sliding, Dual Door 600W	86-9336



19" Fan Tray

Power Distribution Units (A)

The AC Mains Distribution box is designed for 19" horizontal mounting. It has a 15A MCB, a neon indicator and a 3 meter cable for connection to the external power source. Standard models have six 5A sockets. A special model is also available with three 15A sockets. A model with Spike Suppression is also available.

Ordering Information

AC Distribution Box (6 x 5A)	86-1540
AC Distribution Box + Spike Suppressor	86-1540-1
AC Distribution Box + H / W, (3 X 15A)	86-1810
PDU 1U, 10 X IEC Sckts, 15A MCB	86-1547
Inter connect cord 1.5mtr, 4A	88-1514



AC Mains Distribution Box

AC Mains Channel

AC Mains Channels are designed for vertical mounting at the rear of the cabinet. A range of such channels of different lengths are available offering 5A, 15A and IEC sockets to suit cabinet heights. A special version with an Ammeter is also available to monitor current drawn by the equipment.

Ordering Information

AC Mains Chnl, 22U - 28U (8 X 5A)	86-1541
AC Mains Chnl, 30U - 36U (10 X 5A)	86-1542
AC Mains Chnl, 40U - 46U (14 X 5A)	86-1543
AC Mains Chnl, 22U - 28U (3 x 15A)	86-1811
AC Mains Chnl, 30U - 36U (4 x 15A)	86-1812
AC Mains Chnl, 40U - 46U (8 x 15A)	86-1813
AC Chnl, 14 x 5A, Ammeter, MCB 15A	86-1563
AC Chnl, 12 x IEC Sckts, 15A MCB	86-1556
Inter connect cord 1.5mtr, 4A	88-1514



AC Mains Channel

Earthing Accessories

Copper earthing bars and straps are available for providing good quality electrical ground connections. Earthing brackets are available on all side panels and steel doors. These can be used for connecting side panels or doors to electrical ground bars by means of the electrical straps.

Ordering Information

Strap, Earthing, Braided 300mm	86-1507
Bar, Earthing, Cu, 16 X 3 X 375mm	86-1508
Earth Continuity Kit	86-1718
Earthing Lead, Cu, 40 / 36 L=200mm	86-1503
Earthing Lead, Cu, 40 / 36 L=300mm	86-1504
Bar, Earthing, Cu, 22U-28U	86-1509
Bar, Earthing, Cu, 30U-36U	86-1510
Bar, Earthing, Cu, 39U-46U	86-1511



Earthing Accessories